



Clean Fuel & Lubricant Solutions

Inline 12 Manifold

DFF1012

Clean Solutions Filter Manifolds expand capacity and increase flow rate beyond the capability of a single or dual filter head. The DFF1012 Inline 12 Manifold is constructed of heavy duty carbon steel with no external aluminum. It handles flow rates of up to 700 gpm / 2650 lpm.

Dividing the flow between multiple filters plumbed in parallel slows the flow rate per filter, reducing pressure drop and extending filter life.


A variety of filter medias are available to meet the specific application requirements.



SPECIFICATIONS

Filter Quantity*	12
Mounting Connection	4" ANSI 150 Flanges
Max. Flow Range**	700 gpm / 2650 lpm
Shipping Weight	128 lbs / 58 kg
Sampling	Includes up-stream and down-stream mini-mess sampling ports with M16 x 2 thread
Fluid Compatibility	All diesel fuels and lubricants
Working Pressure	150 psi / 1034 kPa / 10.3 bar
Construction	No External Aluminum
Compatible Filters	DBB8664, DBB8665, DBB8666, DBB8777, DBB0248
Accessories (Sold Separately)	P174396 Electrical Indicator DFF1005 Blanking Cap P563809 Gauge Adapter P562709 Pressure Gauge
Operating Temperature	-40 to 245 °F / -40 to 120 °C

DFF1012 Manifold

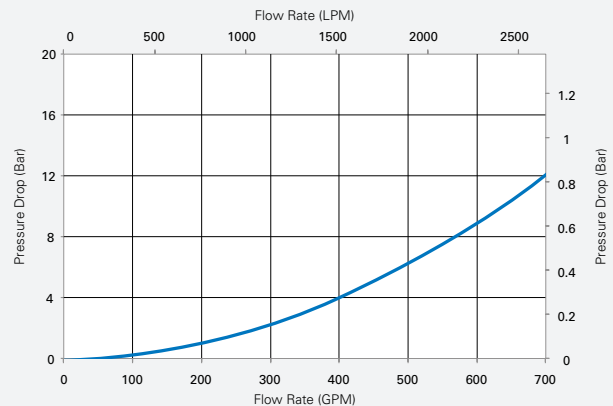

*Filters sold separately

**Actual flow rate varies based on fluid viscosity, pumping pressure and filter loading.


FEATURES

- Fast, easy and safe to service
- Requires no electrical or air hook-ups
- Large capacity in small foot print
- Flexible mounting options (horizontal or vertical)
- Cost effective high flow filtration
- Incorporated drain plugs facilitate clean servicing
- Comes shipped in reusable trunk

APPLICATIONS

- Bulk fuel and lubricant filtration and water removal
- High flow transfer into or out of tanks and dispensing
- Hard-to-filter high viscosity oils
- Inline industrial filtration of gear oils and lubricants
- Kidney loop applications
- No external aluminum for underground mining applications

DIMENSIONS

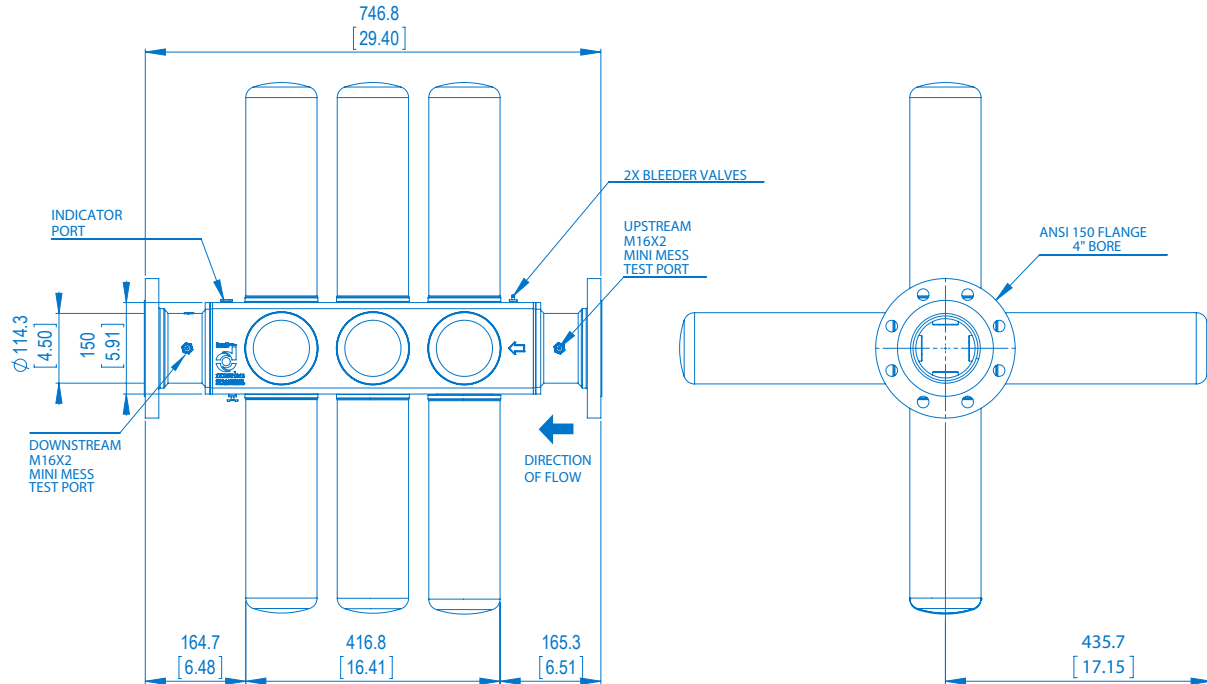

INSTALLATION

- Up to 6 filter orifices may be blocked off to enable flush configuration (sold separately)
- Install on pressure side of pump with arrows pointing in direction of flow
- May be mounted horizontally or vertically
- Allow 16.5" / 410 mm clearance to face for filters
- Ensure proper containment for servicing filters (drip pan or other)
- Install filter manifolds per local codes and regulations
- Optional P562709 pressure gauge and P563809 gauge adapter sold separately
- Use with Clean Solutions filter models DBB8664, DBB8665, DBB8666, DBB8777, DBB0248

REPLACEMENT PARTS & SERVICE

- Service filter when flow slows or predetermined differential pressure is reached
- When servicing change all filters, all replacement filters must be identical
- Isolate manifold, relieve pressure and drain prior to removing old filters
- Install new filters on heads by spinning clockwise, tighten ½ turn after filter seats in gasket
- Dispose of used filters appropriately



Achieve More.

Visit MyCleanDiesel.com for your own Clean Solutions.



Donaldson Company, Inc.
Minneapolis, MN USA

855-518-7784 (USA/Canada)

MyCleanDiesel.com
donaldsonfilters.com

Need a Clean Solution?

As a global organization, we have offices throughout the world. Please direct your inquiry to clean.solutions@donaldson.com. This will enable us to address your inquiry in the shortest possible time.

Mexico	Brazil	South East Asia	Korea
Latin America	Europe & Middle East	Greater China	Australia
Caribbean	South Africa	Japan	India

Brochure No. F111516 ENG (2/15)

© 2014 Donaldson Company, Inc. All rights reserved. Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice. Printed in the U.S.A.